

INDEPENDENT PLUG-IN HEATED HOSE
Solution for Portable Spray Systems

► An Independent Heated Hose Solution

Hose heat is no longer dependent to your Reactor or any other spray equipment, eliminating recirculation – saving you time, and providing consistent heating – giving you better material yield.

The Graco Independent Plug-in Heated Hose provides hose heat in a stand-alone system that can be plugged into a standard 120V or 240V outlet. Available in 50, 100 or 150 foot continuous lengths you now have total control for reliable, fast and controlled heat to meet your application needs.

An ideal solution for Graco Reactor® E-10, E-10hp and E-8p models.



► A Better, More Productive Solution



Be More Productive

- At the start of the day, heated hoses get you running quicker without having to recirculate your hose material to get up to temperature.
- Heated hoses maintain chemical temperatures even when you are not spraying, so no need to put the machine in “recirc-mode” every time you set the gun down.
- Eliminates the recirculation hose bundle, removing two hoses from the bundle, making the hose lighter weight and more flexible.



Better Chemical Yield


- Maintains chemical temperature in hose when not spraying reassuring no cold material is being sprayed allowing for better yield.
- Uses a Fluid Temperature Sensor (FTS) to accurately monitor and maintain desired temperature.
- Adjustable temperature control allows you to select the desired temperature up to 160°F.
- 20 degree delta-T for every 50 feet.* Depending on the hose length and voltage, you can get between 20-60°F delta-T while spraying.

** Delta-T performance is dependant on many factors, actual Delta-T may vary.*



Extend Your Spray Season

- Heated hoses extend the spray season into the colder months without worrying about alternative ways of keep the chemical warm.
- For chemicals typically sprayed at room temperature (70°F) the heated hose allows you to keep spraying even when ambient temperatures are less than ideal.

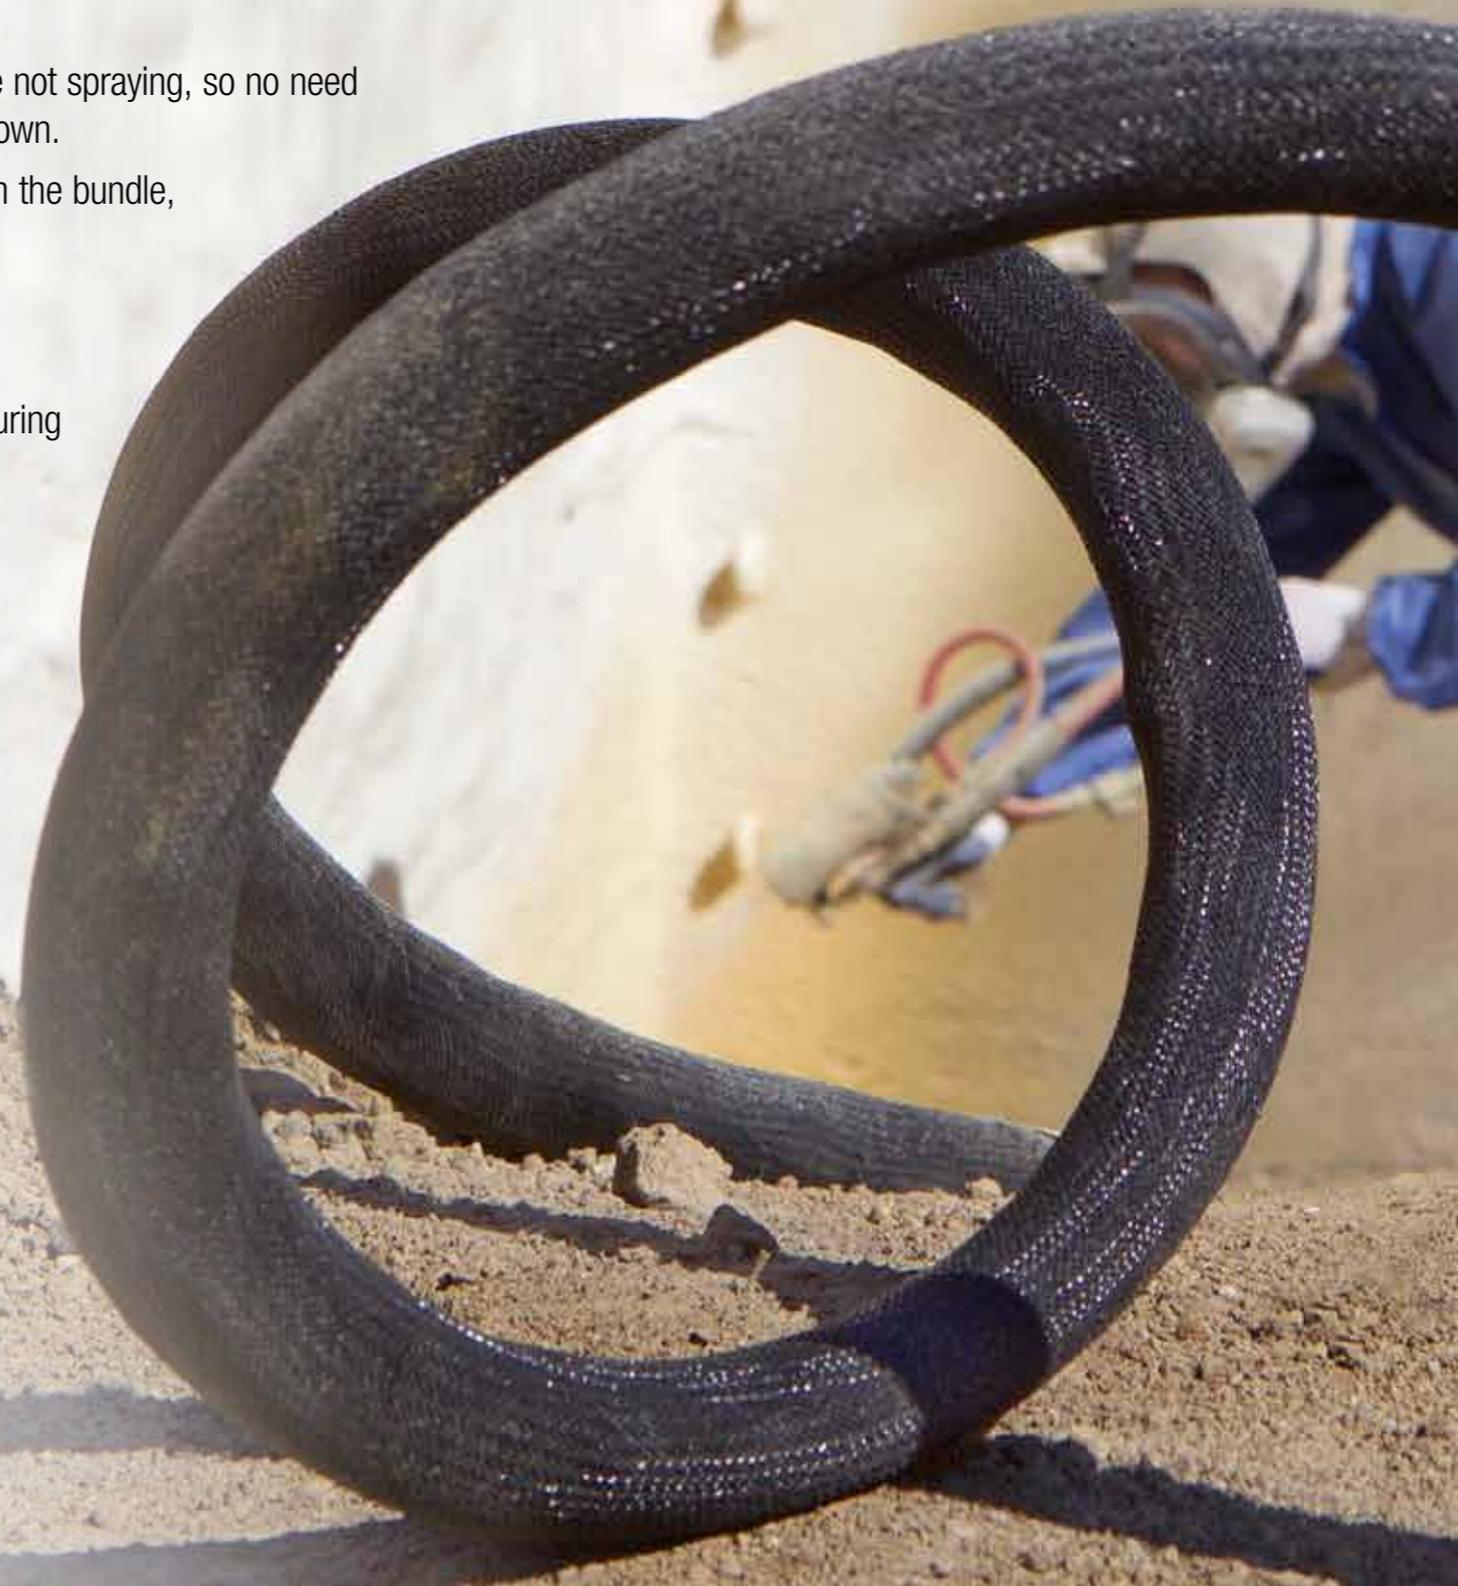

► Ordering Information

Add the Graco Independent Plug-in Heated Hose as an accessory to your portable system. The hose can be retrofit on any Graco portable system in the field, or can be used independently for other applications where a heated hose may be beneficial.

How to order – two simple steps:

Step 1: Pick your hose length in the desired voltage

Determine length of hose, 50 ft., 100 ft. or 150 ft. and voltage, 120V or 240V.

It is important to note that you cannot add hose lengths together. All hoses must be used with a whip hose.

HOSE PART NUMBER	HOSE LENGTH	VOLTS	AMPS	WATTS/FT	DELTA T @ 0.5 GPM*	RATED HOSE PRESSURE
26C013	50 ft	120	12	13	20 F	3000 psi
26C014	100 ft	120	12	6	20 F	3000 psi
26C015	50 ft	240	6	13	20 F	3000 psi
26C016	100 ft	240	12	13	40 F	3000 psi
26C017	150 ft	240	16	13	60 F	3000 psi

* Delta-T performance is dependant on many factors, actual Delta-T may vary.

Step 2: Pick the controller kit that will work with your hose voltage and Graco machine

Determine which sprayer you will be using: E-10, E-10hp, or E-8p, and match the voltage of the controller with the voltage of the hose you choose.

(The voltage of the hoses and controller do not have to match the voltage of the machine.)

CONTROLLER KITS	MACHINE	VOLTS	TEMP UNITS
25M750*	E-8p	120	F
25M751*	E-10/E-10hp	120	F
25M752*	E-8p	240	F
25M753*	E-10/E-10hp	240	F
25M754*	E-8p	240	C
25M755*	E-10/E-10hp	240	C

*Kits include: the controller, machine install kit, FTS, and whip hose



AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000 Fax: 612-623-6777

EUROPE

BELGIUM

Graco Distribution BVBA
Industrieterrein-Oude Bunders
Slakweidestraat 31
B-3630 Maasmechelen,
Belgium
Tel: 32 89 770 700 Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500 Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7
1029 Zhongshan Road South,
Huangpu District
Shanghai, 200011
The People's Republic of China
Tel: 86 21 649 50088 Fax: 86 21 649 50077

INDIA

Graco India Private Limited
4th Floor
Augusta Point
Sector 53, Golf Course Road
Gurgaon, Haryana, India 122001
Tel: 91 124 435 4208 Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300 Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400 Fax: 82 31 476 9801



Graco Has You Covered

Facilities Worldwide for Global Support



Quality First

At Graco we pride ourselves on providing best-in-class products. Engineered solutions are manufactured in our own facilities, with the highest standards in the industry. We provide you with world-class customer support and expertise to help solve your application challenges.



Global Reach

Graco has facilities across the globe to provide you with the products and service you need, where you live. Plus, Graco has dedicated field experts in all areas of the world to support the products we sell.



Product Capabilities

Graco has a broad range of products that are engineered and tested to perform in the harshest environments so you can be certain your equipment is protected and working at peak performance.

► **Contact us today!** Call 866-361-5959 to talk with a Graco representative, or visit www.graco.com for more information.