

GENUINE GRACO PARTS AND ACCESSORIES



248969 Cleanout Tool Kit

For the **FUSION** Plural Component, Impingement Mix Air Purge Spray Gun



Read warnings and instructions.
Refer to manual 309550.

407407A




Do not drill into metal during cleanout operation.

Use N Methyl Pyrrolidone (NMP), Dynasolve CU-6, Dzolv, or equivalent to soften cured material.

CAUTION

These solvents are not recommended for flushing.

Passage Description	Ref. Letter	Diameter, in. (mm)
Optional Air Inlet, Air Valve Bore	C	7/16, 1/8 (11.0, 3.1)
Purge Air	D	1/8 (3.1)
Piston Air	E	1/8 (3.1)
Air Exhaust, Optional Air Inlet	F	11/32, 1/8 (8.7, 3.1)
Air Valve Bore	H	9/32 (7.1)
Cleanoff Air Inlet	K	3/32 (2.35)
Check Valve Holes	L	3/32 (2.35)
Grease Port	M	3/32 (2.35)
Cleanoff Air Exit	N	3/32 (2.35)

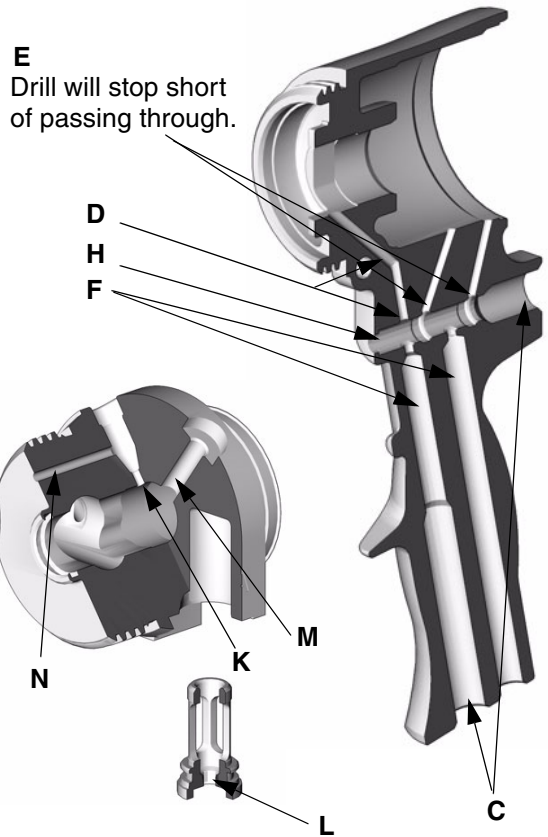

Graco Inc. P.O. Box 1441 Minneapolis, MN 55440-1441
307707 Rev. A 08/2004 Printed in USA
Copyright 2004, Graco Inc. is registered to I.S. EN ISO 9001



WWW.DIAMONDLINERS.COM

Mailing Address

9507 Santa Fe Springs Road
Santa Fe Springs, CA 90670

Phone

(562) 781-1045 or (800) 543-1212

Fax

(562) 781-1045

Email

info@diamondliners.com